

HA13490P, HA13490MP, HA13490FP

Voice Coil Motor Driver

Description

HA13490/FP/MP are VCM drive IC for HDD and have following functions and features.

Functions


- Input buffer amp
- 1.2 A peak BTL output amp
- Retract input
- Chip enable input
- Independent OP amp
- OTSD (Over Temperature Shut Down)

Features


- Wide operating voltage range
- No cross-over distortion
- Small external components
- Low saturation voltage
- 3 types package line up

Ordering Information



Type No.	Package
HA13490P	300 mil 16 pin plastic DIP (DP-16C)
HA13490MP	18 pin plastic QFI (MP-18T)
HA13490FP	16 pin plastic SOP (FP-16T)

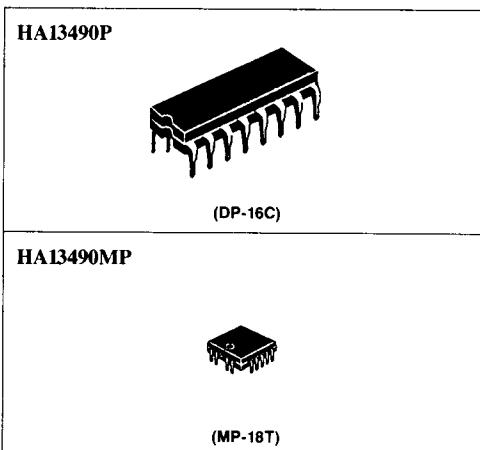

Pin Arrangement

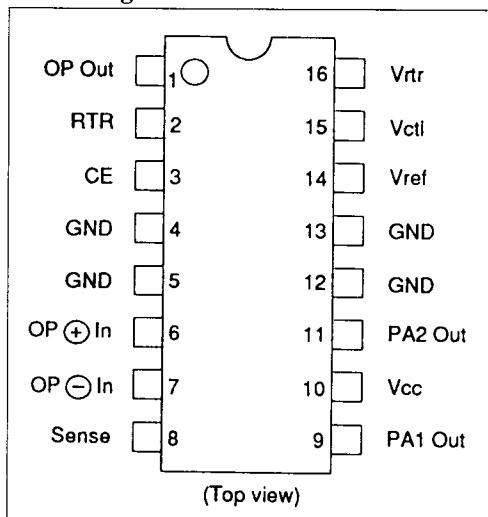

HA13490P

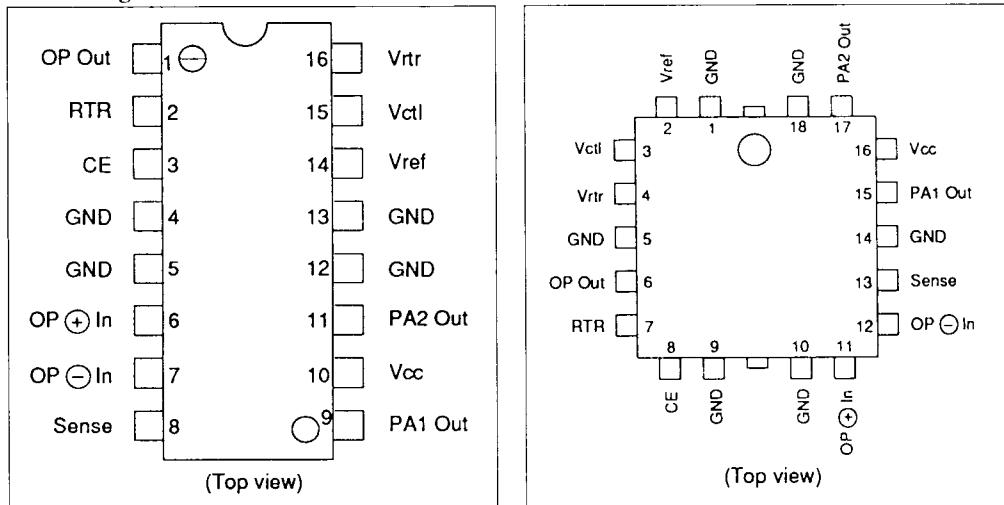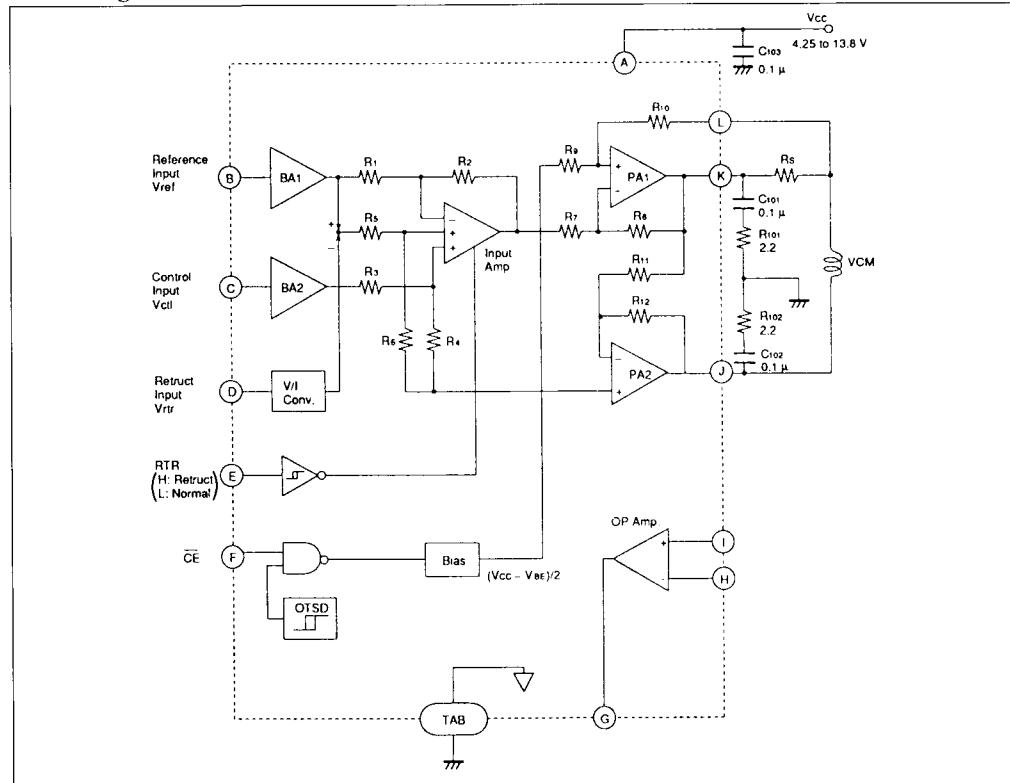Pin Arrangement**HA13490FP****HA13490MP****Block Diagram**

HA13490P, HA13490MP, HA13490FP

Table 1 External Components

Parts No.	Recommended Value	Purpose	Note
R101, R102	2.2 Ω	Stability	
Rs	2.0 Ω	Current sense	1
C101, C102	0.1 μF	Stability	2
C103	≥0.1 μF	Power supply bypass	

Note: Use a reactance free resistance.

The relation between output current and input voltage can be described as follows.

When RTR is L

$$I_o = -gm(V_{ctl} - V_{ref})$$

When RTR is H

$$I_o = -gmr V_{tr}$$

Where gm and gmr are internal constant (see electrical characteristics) and output current "+" means source current from PA1 and "-" means sink current.

Table 2 Absolute Maximum Ratings (Ta = 25 °C)

Item	Symbol	HA13490	HA13490MP	HA13490FP	Unit	Note
Supply voltage	Vcc	15	15	15	V	1
Input voltage	Vin	0 to Vcc	0 to Vcc	0 to Vcc	V	2
Peak output current	Iopeak	1.2	1.2	1.2	Ap	3
DC output current	Io	0.8	0.8	0.8	A	
Power dissipation	PT	2(Tpin=120 °C)	2(Tpin=100 °C)	2(Tpin=70 °C)	W	4
Junction temperature	Tj	150	150	150	°C	1
Storage temperature	Tstg	-55 to +125	-55 to +125	-55 to +125	°C	

The absolute maximum ratings are limiting values, to be applied individually, beyond which the device may be permanently damaged. Functional operation under any of these conditions is not guaranteed. Exposing a circuit to its absolute maximum rating for extended periods of time may affect the device's reliability.

Notes: 1. Recommended operating range is as follows.

$$Vcc = 4.25 \text{ to } 13.8 \text{ V}$$

$$Tjopr = 0 \text{ to } 125 \text{ °C}$$

2. Apply to CE, RTF, Vref, Vctl and Vtrr input.

$$t \leq 20 \text{ ms}$$

4. Package thermal data

Item	HA13490	HA13490MP	HA13490FP	Unit
θj-pin	15	25	40	°C/W
θj-a	60	80	100	°C/W



HA13490P, HA13490MP, HA13490FP

Table 4 Electrical Characteristics (Ta = 25 °C, Vcc = 12 V)

Item	Symbol	Min	Typ	Max	Unit	Test Condition	Appli- cation Terminal	Note
Quiescent current	I _{QCO}	—	0.15	0.4	mA	V _{CC} = 13.8 V	CE=H	A
	I _{QC}	—	7.5	15	mA	I _O =0	CE=L	
CE & RTR	Input low voltage	V _{IL}	—	—	0.8	V	E, F	
	Input high voltage	V _{IH}	2.0	—	—	V		
BA1 & BA2	Input current	I _{ITL}	—	—	±2.5	μA	V _{IN} =0 to V _{CC}	
	Input offset current	ΔI _{ITL}	—	—	±0.5	μA		
	Input offset voltage	V _{IO1}	—	—	±10	mV	V _{REF} =6 V	B, C 1
PA1 & PA2	Common mode voltage range	V _{CM1}	$\frac{1}{3}V_{CC}$ —	$\frac{2}{3}V_{CC}$	V		B, C	
	Quiescent voltage	V _O	5.3	5.65	6.0	V	K, J	
	Leak current	I _{CER}	—	—	4.0	mA	V _{CE} =15 V	
Output total Saturation voltage	V _{SAT}	—	1.8	2.4	V	I _O =0.8 A	K, J	
		—	1.2	1.4	V	I _O =0.1 A		
BA to PA	V/I transfer gain	gm	—	0.5	—	A/V	R _S =2 Ω	K, L 1
	Gain bandwidth	B	—	75	—	kHz	gm=-3 dB	K, L 2
Total harmonic distortion	Phase shift	Δφ	—	8	—	deg.	f=10 kHz	
		D	—	—	2	%	f=1 kHz, I _O =0.1 Arms	
V _{TR} to PA	Offset voltage	V _{IO2}	—	—	±20	mV	D	3
	Retract gain	g _{MR}	—	0.1	—	A/V	R _S =2 Ω	L



HA13490P, HA13490MP, HA13490FP

Electrical Characteristics(T_a = 25 °C) (cont)

OP amp	Input current	I_{op}	—	—	± 1.0	μA	H, I	
	Input offset current	ΔI_{op}	—	—	± 0.1	μA		
	Input offset voltage	V_{io3}	—	—	± 5	mV		
	Common mode voltage range	V_{cm3}	2	—	10	V		
	Openloop voltage gain	G_{ol}	—	60	—	dB	$f=1$ kHz	G
	Gain bandwidth	B_3	—	1000	—	kHz	$G_{ol}=0$ dB	
	Output low voltage	V_{OL}	—	—	1.0	V	$I_{OL}=1$ mA	
	Output high voltage	V_{OH}	V_{cc}	—	—	V	$I_{OH}=1$ mA	
OTSD	Shutdown temperature	T_{sd}	—	150	—	°C		
	Hysteresis	$Thys$	—	25	—	°C		

Notes: 1.

See figure 1.
The gm(V/I transfer gain) can be calculated as.

$$gm = \Delta I_o / \Delta V_{ctl} \quad (A/V)$$

2. Test conditions are follows.

$$R_s = 2 \Omega$$

$$R_L = 10.5 \Omega \text{ (Non inductive)}$$

3. See figure 2.

The gmr(Retract gain) can be calculated as

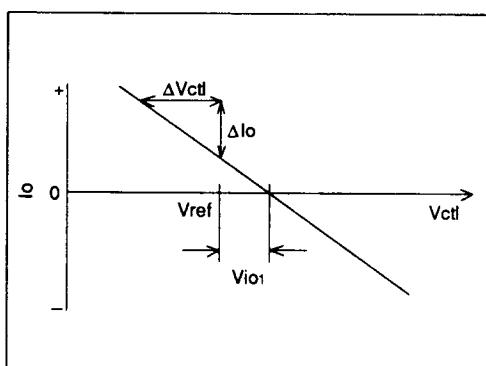


Figure 1 I_o vs. V_{ctl}

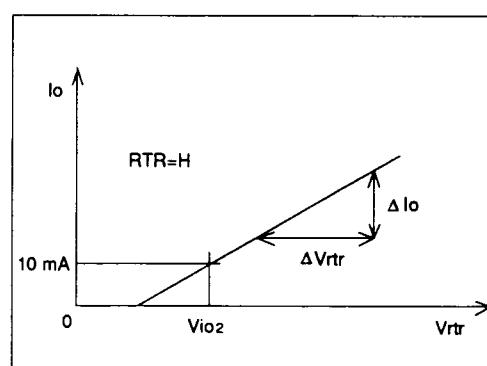


Figure 2 I_o vs. V_{rtr}

